
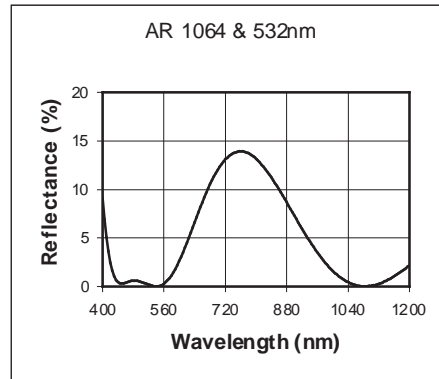


SPECIFICATIONS	
Damage Threshold:	10 J/cm ² 10 ns pulse
Surface Quality:	10/5
Clear Aperture:	90% of Diameter
Durability:	MIL-C-675

REFLECTANCE		
High Power Single	AR (AP)	
	R 0.25%	AOI = 0°
	R 0.50%	AOI = 45°
High Power Dual	AR (AD)	
	AOI = 0°	R 0.25% @ 1
		R 0.50% @ 2
	AOI = 45°	R 0.50% @ 1
		R 1.00% @ 2

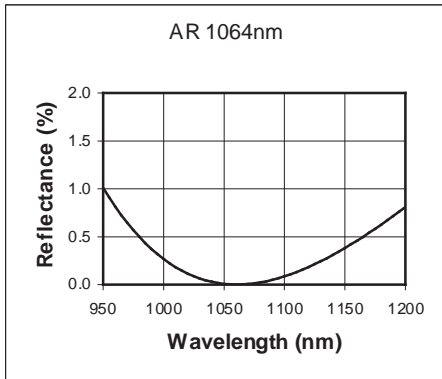

PART NUMBER		
High Power Single	AR (AP)	Wavelength (nm)
0°	45°	
AP-0266	AP-0266-45	266
AP-0355	AP-0355-45	355
AP-0532	AP-0532-45	532
AP-0694	AP-0694-45	694
AP-1047	AP-1047-45	1047
AP-1053	AP-1053-45	1053
AP-1046	AP-1046-45	1064
AP-1235	AP-1235-45	1235
AP-1315	AP-1315-45	1315

PART NUMBER		
High Power Dual	AR (AD)	Wavelength (nm)
0°	45°	
AD-0532/0633	AD-0532/0633-45	532 & 633
AD-1064/0532	AD-1064/0532-45	1064 & 532
AD-1064/0633	AD-1064/0633-45	1064 & 633
AD-1064/0670	AD-1064/0670-45	1064 & 670
AD-1550/0633	AD-1550/0633-45	1550 & 633
AD-1550/1310	AD-1550/1310-45	1550 & 1310

ORDERING EXAMPLE: **WI-2509-U - AP - 1064 - 45**

↑ SUBSTRATE CODE ↑ COATING CODE ↑ WAVELENGTH ↑ AOI